


Product Specification Sheet/Product Submittal Sheet

Drywall Stud 3-5/8" 25 gauge Metal Track

Product Description: 358T125-19
 Web Width: 3-5/8" (3.625")
 Flange Height: 1-1/4" (1.250")
 Gauge: 25 gauge
 Design Thickness: .0188"
 Inside Corner Radii: .095"
 Strengthening Lip: 1/4" (.250")
 Yield Strength: 33 ksi

Conforms to: ASTM A653-11 Standard Specification for Steel Sheet, Zinc-Coated (Galvanized or Zinc-Iron Alloy-Coated (Galvannealed) by the Hot-Dipped Process
 and
 ASTM C645-11a Standard Specification for Steel Nonstructural Steel Framing Members

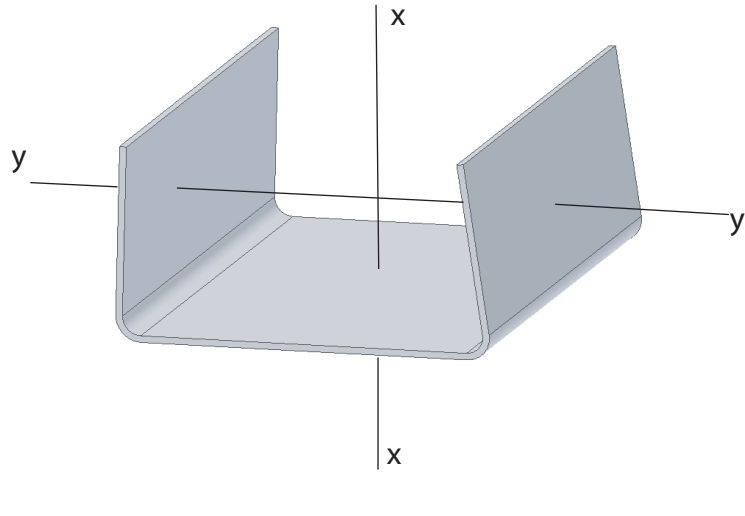

PHYSICAL STRUCTURAL PROPERTIES

Metal Stud	Weight (lbs./ft.)	Cross Section Area (sq.in.)	ABOUT MAJOR AXIS					ABOUT MINOR AXIS		
			X (in.)	I_x (in. ⁴)	S_x (in. ³)	R_x (in.)	M_R (in.-lbs.)			
3-5/8" DWS										
20 gauge (.0312")	0.881	0.215	0.362	0.432	0.238	1.42	4712	0.049	0.054	0.48
22 gauge (.0283")	0.746	0.182	0.351	0.354	0.195	1.39	3861	0.033	0.036	0.43
25 gauge (.0188")	0.479	0.117	0.357	0.226	0.124	1.39	2455	0.022	0.024	0.43